



# Dual Fill Station Monitor Part Number 25692

www.airliftcompany.com

MN-533  
(01209)  
ECN 3974

Please read these instructions completely before proceeding with installation

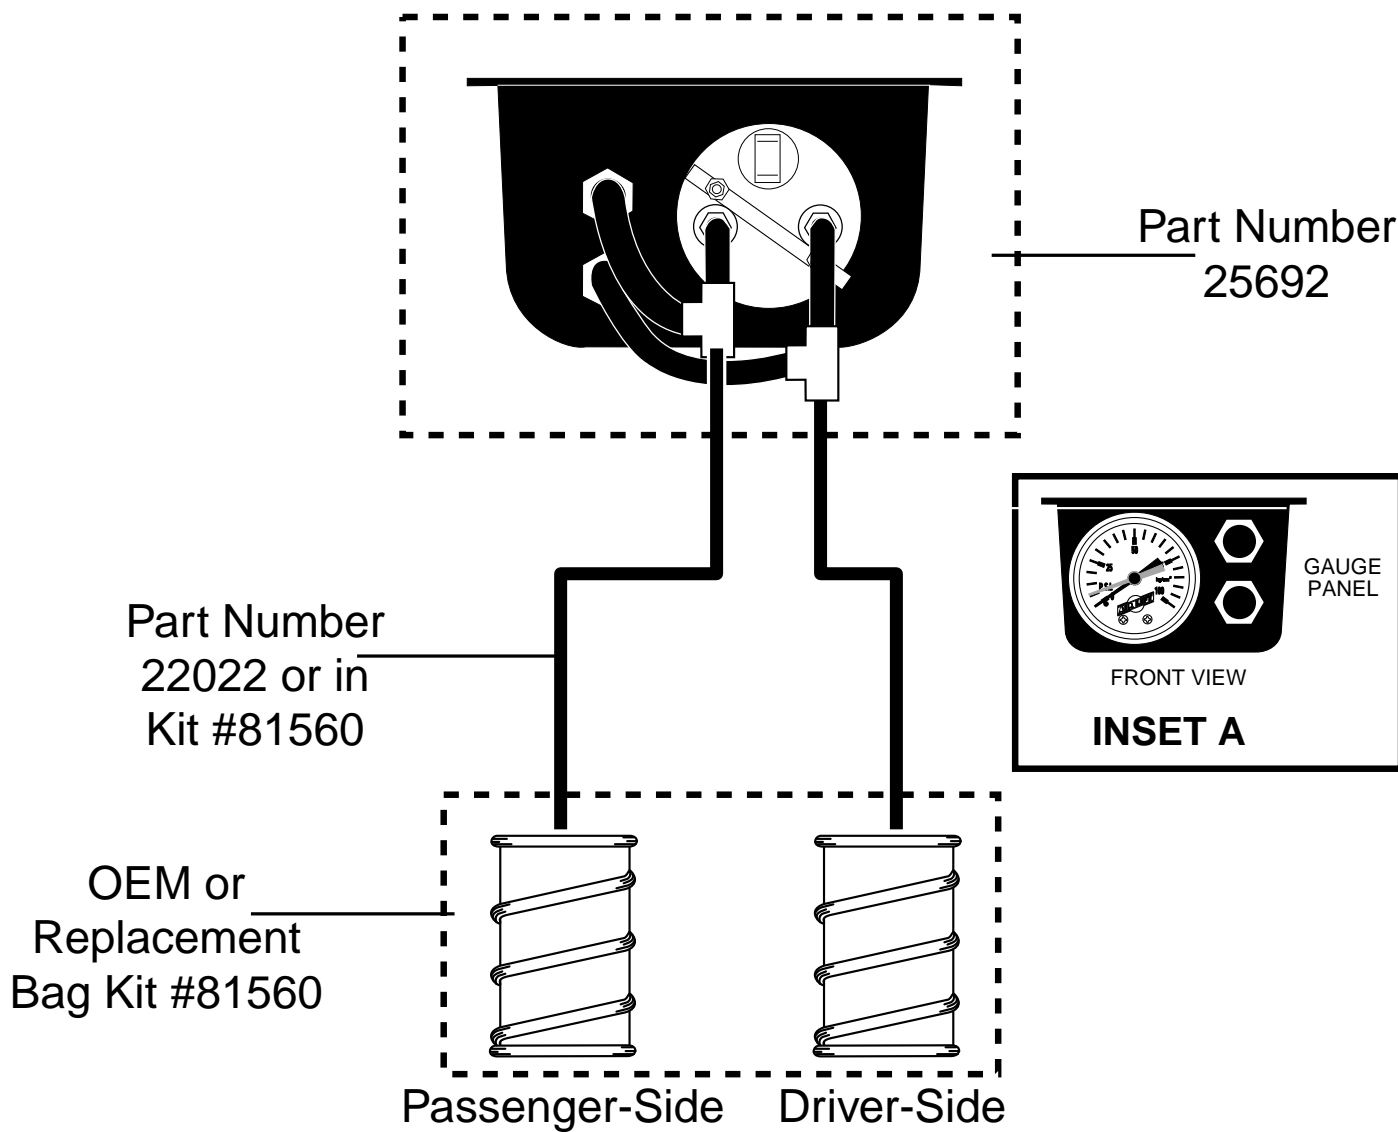


Figure 1

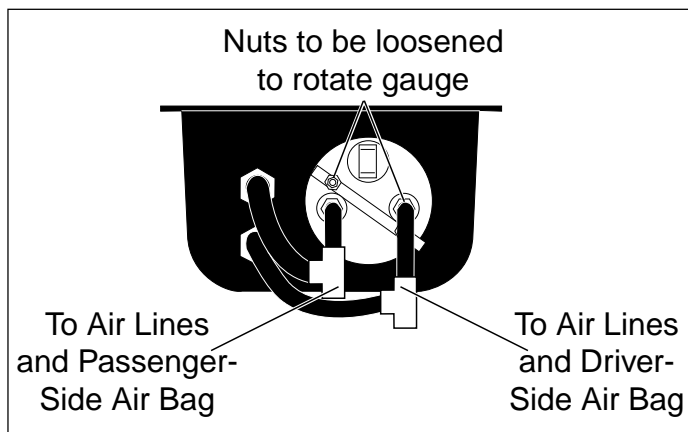


Figure 2

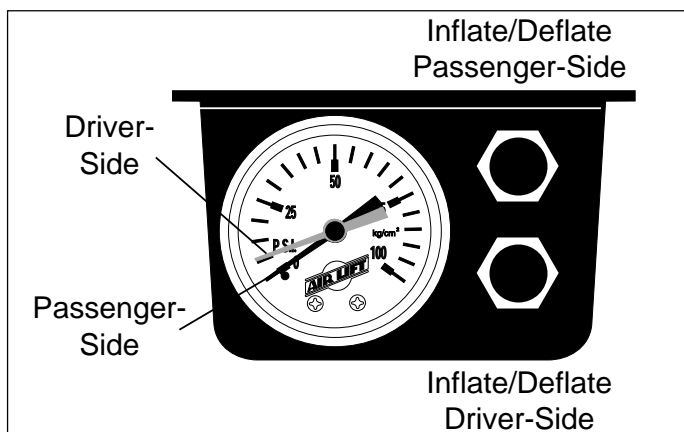


Figure 3

**IMPORTANT:** If you have separately purchased part #22022, Remote Fill Lines, or if you have had kit #81560 , replacement air bags, installed on your motorhome, additional remote fill lines are not necessary.

If you do not have part #22022 or kit #81560 on your motorhome, it will be necessary to separately purchase #22022, Remote Fill Lines, from an Air Lift dealer in order to connect the air bags to the dual fill station monitor.

## I. Installing the Dual Fill Station Monitor

1. If not already installed, connect part #22022 to the existing air bags.
2. Find a suitable place to mount the dual fill station monitor. The panel can be rotated in any direction for mounting purposes.

*NOTE: The engine compartment is a common place.*

3. If you choose to rotate the panel, loosen the two silver nuts located on the black bar across the back of the gauge (Figure 2). This allows the gauge to rotate.
4. Rotate the gauge and tighten the nuts to keep the gauge from further rotating.

Do not mount the panel at this time.

5. Connect the line from the passenger-side air bag to the connector at the top of the rear of the gauge panel (Figure 2).

*NOTE: The black needle will indicate the amount of pressure for the passenger-side air bag.*

6. Connect the line from the driver-side air bag to the connector at the bottom of the rear of the gauge panel (Figure 2).

*NOTE: The red needle will indicate the amount of pressure for the driver-side air bag.*

7. Mount the gauge panel in the previously chosen location using the provided screws.

## II. Adding Air to the Air Bags

1. Remove the caps and attach the air chuck to the fill valves on the front of the panel (Figure 3). Inflate until the desired pressure has been obtained. Replace the cap.
2. See your owner's manual for air bag pressure specifications. Follow these guidelines when increasing or decreasing the air pressure in your vehicle's air bags.

### ***Thank you for purchasing Air Lift Products***



Mailing Address:  
AIR LIFT COMPANY  
P.O. Box 80167  
Lansing, MI 48908-0167

Street Address:  
AIR LIFT COMPANY  
2727 Snow Rd.  
Lansing, MI 48917

Local Phone: (517) 322-2144

Fax: (517) 322-0240

For Technical Assistance call 1-800-248-0892

***“The Choice of the Professional Installer”***

Printed in the USA